




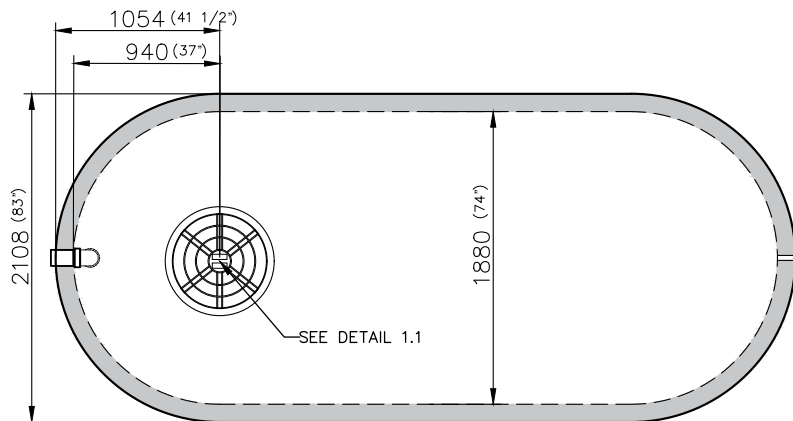


PLAN VIEW

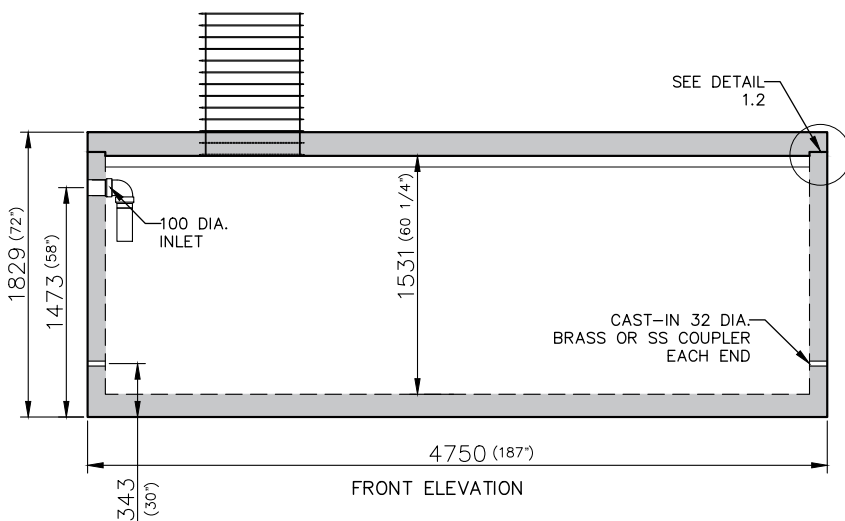

FRONT ELEVATION

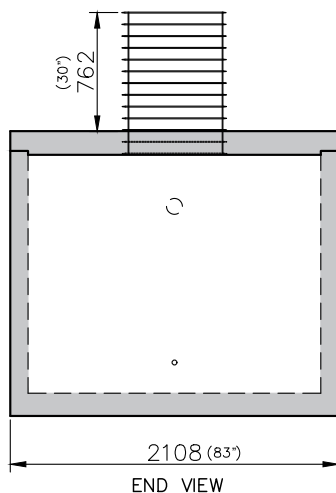

END VIEW

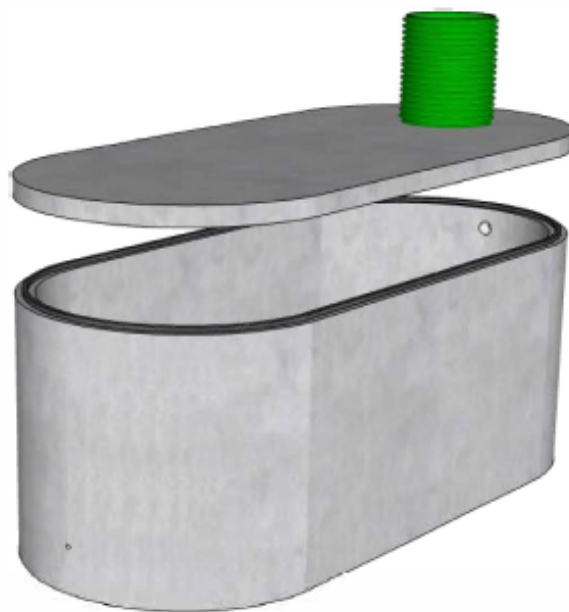


DETAIL 1.1: MANHOLE
600MM (24") ID ULTRA-RIB PVC
(EXTENSIONS AVAILABLE)

ACCESSORIES:
EXTENSION BY THE FOOT
EXTENSION ADAPTER RINGS
INSULATED LID
NON-INSULATED LID
LID W/ 6" PVC THREADED CLEANOUT
VENTED LID
ADHESIVE



POLYLOK 24" SAFETY SCREEN
PART NO. - 3008-SS
MATERIAL - ABS

- DOME SHAPED FOR MAXIMUM LOAD STRENGTH
- HANDLE FOR EASY REMOVAL
- CAN BE USED WITH OR WITHOUT SCREWS



1-STRIP EZ-STIK 1 1/2" x 1 1/2"
PREFORMED BUTYL JOINT
CENTERED IN THE JOINT
PRE-APPLY EZ-STIK #4 PRIMER
APPLY AS PER MANUFACTURERS
RECOMMENDATIONS

HOLDING TANK NOTES:
WORKING CAPACITY - MAX 2500 GAL.

DIMENSIONS (MET.):
4750 L x 2108 W x 1829 H

DIMENSIONS (IMP.):
187" L x 83" W x 72" H

MANHOLE: SINGLE ULTRA-RIB

BUTYL TAPE SEALS

MAX. BURY DEPTH: 2.13 M (7')



westcon
precast inc.

M-2500 HOLDING TANK

CONCRETE	RELEASE 15 MPa	28 DAY 35 MPa	AIR 6-8%	SLUMP 75 mm	TYPE 50	DWG. NO. W3-09
VOLUME		SELF WEIGHT				
4.56	m³	10933	KGS	24107	LBS	
DATE: MAR 2024		CODE: 0100		BY: JB		
						Rev. 1