




PLAN VIEW

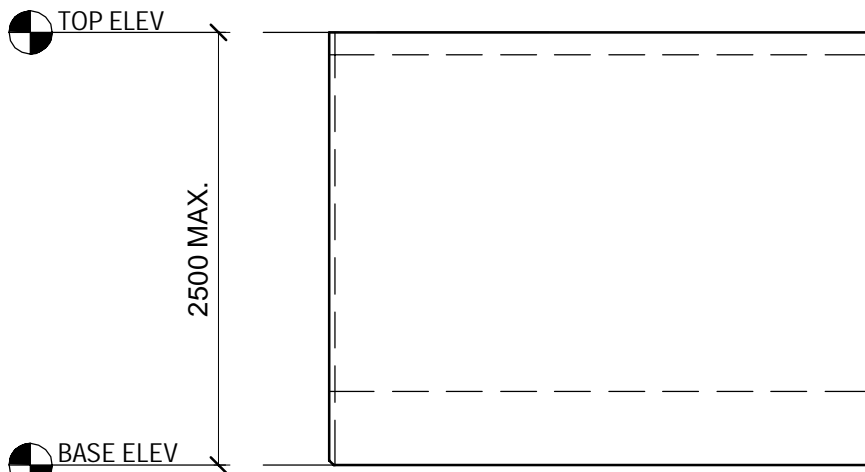

SIDE VIEW

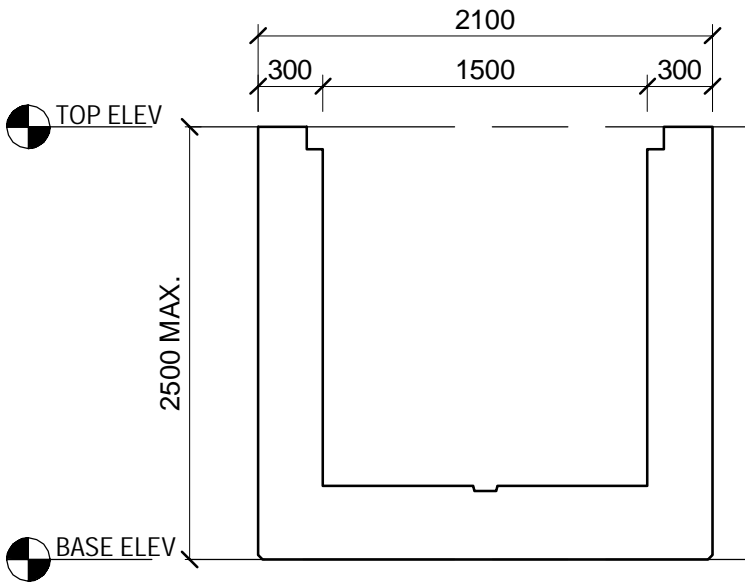

FRONT ELEVATION

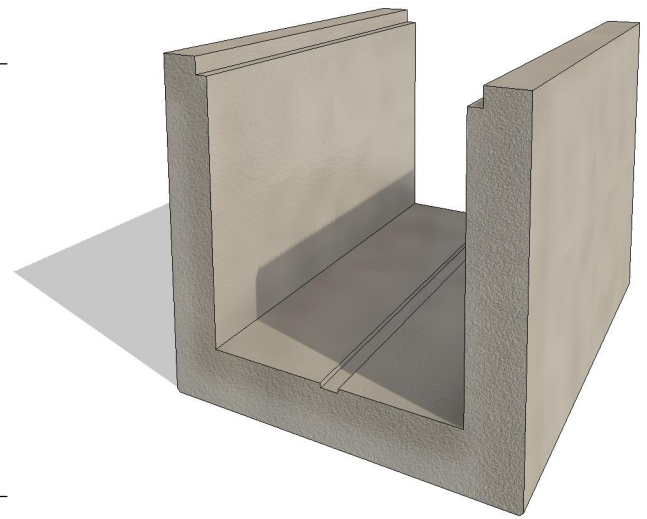

ELEVATION

westcon
precast inc.

1500 TRENCH

CONCRETE	RELEASE 15 MPa	28 day 30 MPa	AIR 5-8%	SLUMP 70mm	TYPE 50	DRW. NO.
VOLUME		SELF WEIGHT			W11-05A	
5.07m ³		12688 kg	27913 lbs			
DATE: APRIL 2022	CODE: 0008	BY: AB	Rev. A			